

# TÜB 60

## Direct-Indirect Suspended Linear Luminaire



### DESCRIPTION

LAMP's Tüb 60 is a visually comfortable indoor direct and direct-indirect luminaire. The luminaire is suspended with options for mounting the driver to the ceiling surface or recessed into the ceiling for a sleek appearance. Opal and Opal Comfort diffused lens options are available for increased UGR ratings. 90 CRI is standard with a variety of Kelvin temperatures, and with three lengths, this luminaire is suitable for indoor retail, new-age office or other applications which require comfortable light levels. The Tüb 60 has a variety of finish options which can be color-matched with other Lamp luminaires for a coordinated indoor lighting solution.



Date: \_\_\_\_\_ Type: \_\_\_\_\_ Catalog Number: \_\_\_\_\_

Project Name: \_\_\_\_\_

### ORDERING INFORMATION

LUMINAIRE										
MODEL	DRIVER MOUNTING	LENGTH	OUTPUT	CRI	CCT	CONTROL	VOLTAGE	OPTIC	FINISH	MOUNTING FINISH
<b>TUB60-D</b> Lamp Tüb 60 Direct	<b>S</b> Surface Mounted Driver Enclosure	<b>2.8</b> 2.8'	<b>SO</b> Standard Output	<b>90</b> 90 CRI	<b>27K</b> 2700K	<b>ON-OFF</b> On/Off	<b>UNV</b> 120-277v	<b>OP</b> Opal Diffused Lens	<b>BL</b> Black	<b>BL</b> Black
<b>TUB60-DI</b> Lamp Tüb 60 Direct-Indirect	<b>R</b> Recessed Mounted Driver Enclosure <sup>1</sup>	<b>3.7</b> 3.7'	<b>HO</b> High Output		<b>30K</b> 3000K	<b>DIM</b> 0-10v Dimming		<b>OPC</b> Opal Comfort Diffused Lens	<b>WH</b> White	<b>WH</b> White
		<b>5.5</b> 5.5'			<b>35K</b> 3500K				<b>SB</b> Signal Blue	<b>SB</b> Signal Blue
					<b>40K</b> 4000K				<b>OW</b> Oyster White	<b>OW</b> Oyster White
					<b>TW</b> Tunable White (2700K to 6500K)				<b>GG</b> Graphite Grey	<b>GG</b> Graphite Grey
									<b>TB</b> Turquoise Blue	<b>TB</b> Turquoise Blue
									<b>SG</b> Silver Grey	<b>SG</b> Silver Grey
									<b>SKB</b> Sky Blue	<b>SKB</b> Sky Blue
									<b>GBRN</b> Grey Brown	<b>GBRN</b> Grey Brown
									<b>VM</b> Vermillion	<b>VM</b> Vermillion
									<b>DO</b> Deep Orange	<b>DO</b> Deep Orange

See page 2 for color palette. See Page 4 for ordering information of available accessories.




www.LampNorthAmerica.com

For other Experience Brands companies, please visit [www.experiencebrandsusa.com](http://www.experiencebrandsusa.com).

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials. Technical specification sheets that appear on [www.lampnorthamerica.com](http://www.lampnorthamerica.com) are the most recent ones available.

# TÜB 60

Direct-Indirect Suspended Linear Luminaire

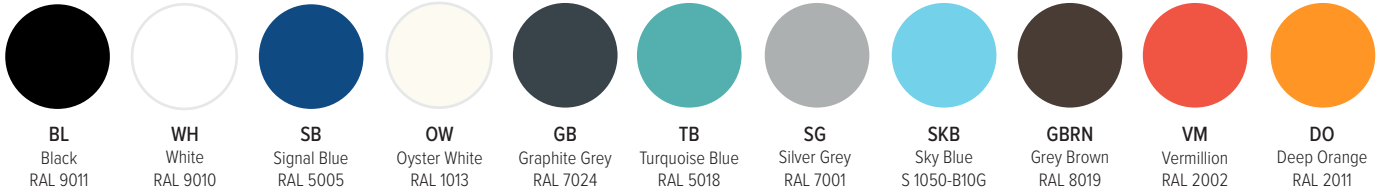

LAMP TÜB 60		
PHYSICAL	HOUSING	Recycled Aluminum Extrusion
	LENS	Opal
		Opal Comfort
	DRIVER LOCATION	Translucent Polycarbonate Diffuser
		Translucent Polycarbonate Diffuser with Optical Sheet for Increased Comfort
	END CAP FINISH	Suspended Driver
		Recessed Driver
	DIMENSIONS	Surface Mounted in 11" (Static White) or 19" (Tunable White) Box, Painted to Match Luminaire
WEIGHT	Ceiling Recessed Mounting	
OPERATING TEMPERATURE	White or Black Standard; See Page 4 for Ordering Information of Other Available Finishes.	
		ø2.48" x 33.07" / 44.09" / 66.14" L
		Between 4.65 to 8.84 Pounds, Depending on Variant
		-40°F to 104°F (-40°C to 40°C)

ELECTRICAL	VOLTAGE	120-277 Volts
	CONTROL	On/Off, 0-10v Dimming
	CABLE FINISH	White Cable for White Luminaires; All Others are Black

PHOTOMETRIC	LUMEN MAINTENANCE	L80 > 72,000 Hours at 77°F*	
	UGR	Opal	Opal Comfort
		UGR < 19	15
CRI	> 90 CRI		

LIGHT DISTRIBUTIONS	OUTPUT	OPTIC	CCT	DIRECT								
				2.8'			3.7'			5.5'		
				LUMENS	WATTAGE	EFFICACY	LUMENS	WATTAGE	EFFICACY	LUMENS	WATTAGE	EFFICACY
STANDARD OUTPUT	OPAL	2700K	717	10	72	955	12	80	1433	17	84	
		3000K	754	10	75	1005	12	84	1508	17	89	
		4000K	778	10	78	1038	12	87	1557	17	92	
	OPAL COMFORT	2700K	663	10	66	884	12	74	1327	17	78	
		3000K	698	10	70	931	12	78	1396	17	82	
		4000K	720	10	72	961	12	80	1441	17	85	
HIGH OUTPUT	OPAL	2700K	1468	17.8	82	1957	25.4	77	2936	34.7	85	
		3000K	1545	17.8	87	2060	25.4	81	3089	34.7	89	
		4000K	1594	17.8	90	2126	25.4	84	3189	34.7	92	
	OPAL COMFORT	2700K	1359	17.8	76	1912	25.4	75	2717	34.7	78	
		3000K	1430	17.8	80	1906	25.4	75	2860	34.7	82	
		4000K	1476	17.8	83	1968	25.4	77	2951	34.7	85	

Values based on full output.

\* LED life may vary under actual field conditions due to external factors. Lifetime estimates are generated from actual testing in a controlled environment. Values are conservatively derived from those numbers.



[www.LampNorthAmerica.com](http://www.LampNorthAmerica.com)

For other Experience Brands companies, please visit [www.experiencebrandsusa.com](http://www.experiencebrandsusa.com).

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials. Technical specification sheets that appear on [www.lampnorthamerica.com](http://www.lampnorthamerica.com) are the most recent ones available.

# TÜB 60

Direct-Indirect Suspended Linear Luminaire




LIGHT DISTRIBUTIONS	OUTPUT	OPTIC	CCT	DIRECT-INDIRECT											
				2.8'				3.7'				5.5'			
				WATTAGE	EFFICACY	LUMENS UP	LUMENS DOWN	WATTAGE	EFFICACY	LUMENS UP	LUMENS DOWN	WATTAGE	EFFICACY	LUMENS UP	LUMENS DOWN
STANDARD OUTPUT	OPAL	2700K	20	66	600	717	22	82	840	955	34	81	1320	1433	
		3000K	20	69	632	754	23	82	884	1005	34	85	1389	1508	
		4000K	20	72	652	778	23	85	912	1038	34	88	1433	1557	
	OPAL COMFORT	2700K	20	63	599	663	23	75	840	884	34	78	1319	1327	
		3000K	20	66	630	698	22	82	883	931	34	82	1388	1396	
		4000K	20	69	651	720	22	85	911	961	34	85	1433	1441	
HIGH OUTPUT	OPAL	2700K	27	77	600	1468	36	78	841	1957	51	83	1321	2936	
		3000K	27	81	632	1545	36	82	884	2060	51	88	1390	3089	
		4000K	27	83	652	1594	36	84	913	2126	51	91	1434	3189	
	OPAL COMFORT	2700K	27	73	600	1359	36	74	839	1812	51	79	1320	2717	
		3000K	27	76	631	1430	36	78	884	1906	51	83	1388	2860	
		4000K	27	79	651	1476	36	80	912	1968	51	86	1433	2951	

Values based on full output.

CERTIFICATIONS	SAFETY	CSA Certification Pending
	INGRESS PROTECTION	IP20
	IMPACT RATING	IK07
	WARRANTY	Five Year Limited Warranty

## DIMENSIONS

All dimensions are shown in inches unless otherwise noted. Side view shown.

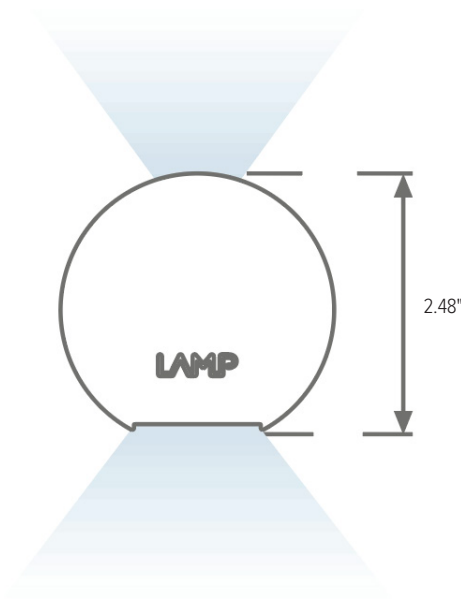

\* LED life may vary under actual field conditions due to external factors. Lifetime estimates are generated from actual testing in a controlled environment. Values are conservatively derived from those numbers.

# TÜB 60

Direct-Indirect Suspended Linear Luminaire



## ACCESSORIES


NOTE: Accessories are ordered and shipped separately from luminaire for field installation.

-XX\* indicates a painted accessory. See bottom of page for painted accessory ordering information.



TUB60-EC-XX\*\*

End Cap

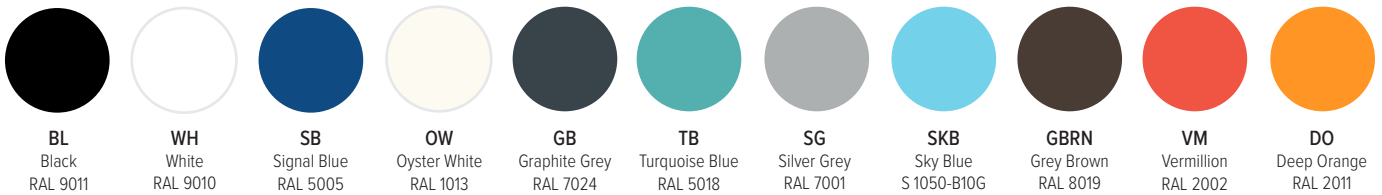

## ORDERING INFORMATION

### PAINTED ACCESSORIES

MODEL	FINISH (*-XX)
TUB60-EC End Cap (Quantity 1)	<b>BL</b> Black
	<b>WH</b> White
	<b>SB</b> Signal Blue
	<b>OW</b> Oyster White
	<b>GG</b> Graphite Grey
	<b>TB</b> Turquoise Blue
	<b>SG</b> Silver Grey
	<b>SKB</b> Sky Blue
	<b>GBRN</b> Grey Brown
	<b>VM</b> Vermillion
	<b>DO</b> Deep Orange