

**LAMP**

By Nordeon USA



# **STORMBELL & STORMBELL DECO**

LED Pendant Downlight

# STORMBELL

LED Pendant Downlight

The timeless styling of **STORMBELL** unites classic form with state-of-the-art LEDs. Suspended by stainless steel aircraft cable, the pendant luminaire becomes a focal point in any architectural, retail, hospitality, or institutional interior setting. **STORMBELL** incorporates reflective optics within the housing to provide medium or wide beam distributions. Two lumen packages are available in warm or neutral white color temperatures at a CRI of 90+. Optional accessories include honeycomb louver or opal glass lens for diffusion for added light control.

## PERFORMANCE (BOTH MODELS)

|                   |   |          |
|-------------------|---|----------|
| Housing Finish    | High gloss black or white               |          |
| Shade Finish      | High gloss black, white, or opal        |          |
| Color Temperature | 3000k warm white or 4000k neutral white |          |
| Color Rendering   | Ra > 90                                 |          |
| Power Consumption | Standard Output:                        | 27 watts |
|                   | High Output:                            | 47 watts |

| DELIVERED LUMENS | Stormbell          | Stormbell Deco     |
|------------------|--------------------|--------------------|
| STANDARD OUTPUT  | 2066 - 2202 Lumens | 2277 - 2639 Lumens |
| HIGH OUTPUT      | 3176 - 3354 Lumens | 3571 - 4160 Lumens |



# STORMBELL DECO

LED Pendant Downlight

**STORMBELL DECO** features an illuminated band between the housing and shade to create visual interest and ambience well suited to interior architectural, retail, hospitality, or institutional applications. The housing in high-gloss black or white finishes may be mixed or matched to white, black, or opal shades to create a unique look tailored to the space. Reflective optics within the housing provide medium or wide beam distributions.


## FEATURES

- Designed in Spain, Assembled in the USA
- Universal and timeless design
- Beautiful combination of function and form
- Designed by Artec3 Design Studio



# LAMP

By Nordeon USA

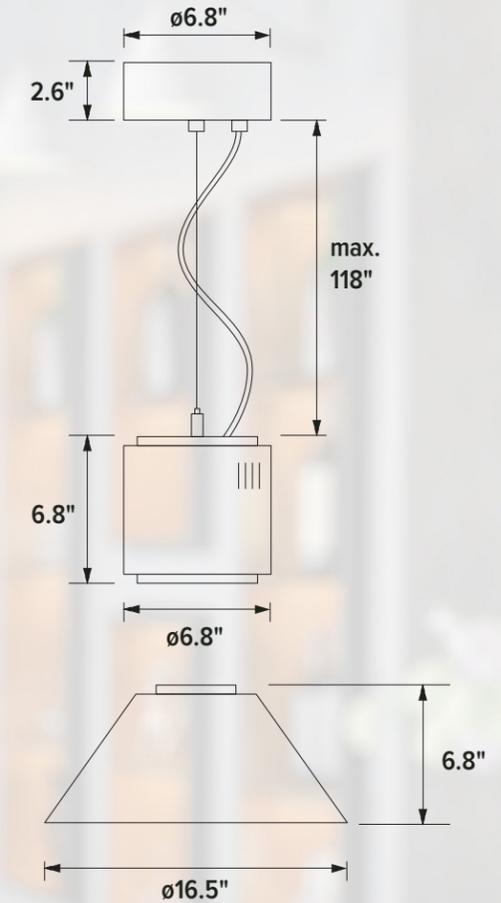


## PHOTOMETRICS

### STORMBELL STANDARD OUTPUT

#### MEDIUM BEAM — 3000K

ST173-STD-LED-30K-MB.IES

|                         |              |
|-------------------------|--------------|
| CIE Type                | Direct       |
| Center Beam Candlepower | 4,141        |
| Beam (Degrees)          | 38°          |
| Spacing Criterion       | .62          |
| <b>Total Lumens</b>     | <b>2,066</b> |




### STORMBELL DECO STANDARD OUTPUT

#### MEDIUM BEAM — 3000K

ST173-DEC-LED-30K-MB.IES


|                         |              |
|-------------------------|--------------|
| CIE Type                | Direct       |
| Center Beam Candlepower | 4,015        |
| Beam (Degrees)          | 39°          |
| Spacing Criterion       | .64          |
| <b>Total Lumens</b>     | <b>2,277</b> |



#### WIDE BEAM — 3000K

ST173-STD-LED-30K-WB.IES


|                         |              |
|-------------------------|--------------|
| CIE Type                | Direct       |
| Center Beam Candlepower | 2,030        |
| Beam (Degrees)          | 57°          |
| Spacing Criterion       | .98          |
| <b>Total Lumens</b>     | <b>2,143</b> |



#### WIDE BEAM — 3000K

ST173-DEC-LED-30K-WB.IES

|                         |              |
|-------------------------|--------------|
| CIE Type                | Direct       |
| Center Beam Candlepower | 2,049        |
| Beam (Degrees)          | 58°          |
| Spacing Criterion       | 1.00         |
| <b>Total Lumens</b>     | <b>2,567</b> |




### STORMBELL HIGH OUTPUT

#### MEDIUM BEAM — 3000K

ST173-STD-HP-LED-30K-MB.IES

|                         |              |
|-------------------------|--------------|
| CIE Type                | Direct       |
| Center Beam Candlepower | 6,358        |
| Beam (Degrees)          | 38°          |
| Spacing Criterion       | .62          |
| <b>Total Lumens</b>     | <b>3,176</b> |




### STORMBELL DECO HIGH OUTPUT

#### MEDIUM BEAM — 3000K

ST173-DEC-HP-LED-30K-MB.IES


|                         |              |
|-------------------------|--------------|
| CIE Type                | Direct       |
| Center Beam Candlepower | 6,336        |
| Beam (Degrees)          | 39°          |
| Spacing Criterion       | .64          |
| <b>Total Lumens</b>     | <b>3,571</b> |



#### WIDE BEAM — 3000K

ST173-STD-HP-LED-30K-WB.IES


|                         |              |
|-------------------------|--------------|
| CIE Type                | Direct       |
| Center Beam Candlepower | 3,111        |
| Beam (Degrees)          | 57°          |
| Spacing Criterion       | .98          |
| <b>Total Lumens</b>     | <b>3,264</b> |



#### WIDE BEAM — 3000K

ST173-DEC-HP-LED-30K-WB.IES

|                         |              |
|-------------------------|--------------|
| CIE Type                | Direct       |
| Center Beam Candlepower | 3,235        |
| Beam (Degrees)          | 59°          |
| Spacing Criterion       | 1.00         |
| <b>Total Lumens</b>     | <b>4,048</b> |



LAMP by Nordeon USA  
 PO Box 28  
 Gaffney, SC 29342

[info@nordeon-usa.com](mailto:info@nordeon-usa.com)  
[www.nordeon-usa.com](http://www.nordeon-usa.com)

May 2020 All rights reserved.

**LAMP**  
 By Nordeon USA